
19 SELECTION GUIDE

SINIAT SCREW **SELECTION GUIDE**

All Siniat Drywall Screws are CE marked and compliant with BS EN 14566.

	SUBSTRATE	SUBSTRATE				
LASTERBOARD	RX / B GAUGE	W / Y GAUGE	TIMBER			
tandard Board apour Board loisture Board ontour Board ire Board Board	B		-			
coustic	GTEC Self Tapping	GTEC Self Drilling	GTEC High Thread			
iniat LaDura iniat Megadeco iniat Universal Board iniat Securtex B Board		18	-			
	GTEC Performance Self Tapping	GTEC Self Drilling	GTEC High Thread			
iniat Aqua Board iniat Weather Defence			-			
	GTEC Wet Area Self Tapping	GTEC Wet Area Self Drilling	GTEC Wet Area High Thread			

	SUBSTRATE					
METAL	RX / B GAUGE	W / Y GAUGE				
RX / B Gauge	GTEC Screw Self Tapping	GTEC Screw Self Drilling				
W / Y Gauge	GTEC Screw Self Drilling	GTEC Screw Self Drilling				

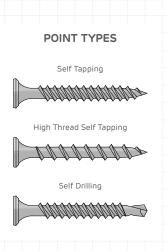



GB Orderline

For placing orders, delivery enquiries, local stockists etc.

- @ orderline@etexbp.co.uk
- **(** 0800 373 636
- (a) 01275 379 037

Technical Services

Advisory service.

- (e) technical.siniat@etexbp.co.uk
- **(** 0800 145 6033

The Training Centre

For all drywall training needs from basic introduction to advanced skills and development.

0800 145 6033



PLASTERBOARD **PORTFOLIO**

DRYLINING PRODUCT RANGE



Etex Building Performance Limited Marsh Lane.

Easton-in-Gordano, Bristol, BS20 ONE +44 (0) 1275 377 773









Copyright © 2020 01/2020

THE SINIAT RANGE

SINIAT BOARD

A range of standard, performance and specialist plasterboards, including solutions for sound, fire and thermal applications.



SINIAT FRAME

A range of strong, lightweight and economic metal framing solutions for drylining.



SINIAT FIX

Siniat screws and adhesives specifically designed for use with plasterboard.



SINIAT FINISH

Complete range of finishing products for seamless taping and jointing for two and three coat applications.



SINIAT LIFETIME SYSTEM WARRANTY

When systems are built entirely with Siniat components and materials, by qualified professionals, in accordance with our latest literature and relevant standards, we can offer our invaluable Siniat Lifetime System Warranty.



Further details about all Siniat products and the Siniat Lifetime System
Warranty can be found on our website
- siniat.co.uk

BUILDING REGS AT A GLANCE

Approved Documents set out minimum requirements to conform to building regulations and make buildings safer, quieter, more comfortable and environmentally friendly.

Approved Document B (Fire safety)

The document covers a wide range of topics related to fire safety including the behavior of materials in the event of fire and the spread of fire within and between the buildings.

Approved Document B specifies provisions of compartmentation which aims to contain fire to ensure safe escape and allow access for firefighting purposes. It defines minimum fire resistance requirements for wall and floor systems based on the height, location and the purpose of building.

Approved Document E (Acoustics)

Approved Document E contains the minimum sound insulation and impact resistance requirements for internal separating walls and floors between the dwellings. Additionally, it provides guidance for sound flanking control and requirements for sound reverberation in large open spaces. It describes the ways to show compliance with building regulations and include suggestions on wall, floor, ceiling and staircase systems and details to achieve building regulation requirements.

Approved Document L (Conservation of fuel and power)


The document sets out legal framework for energy efficiency of the buildings. It targets the heat loss and gain of the building by establishing minimum U-values of the elements (the speed of heat transfer through the element) and introduce Target CO² Emission Rate to reduce environmental impact of the building.

Approved Document Q (Security)

The document aims to reduce the risk of unauthorized access to a building and applies to all newly built dwellings. It states that easy accessible doors and windows must resist opportunistic attack. Also, secure door sets in lightweight walls must include a resilient layer (see Siniat Securtex).

QUICK GUIDE TO SOLUTIONS THAT MEET ALL BUILDING REQUIREMENTS

Our plasterboard range and drylining systems meet the practical and performance needs of all new-build and refurbishment projects.

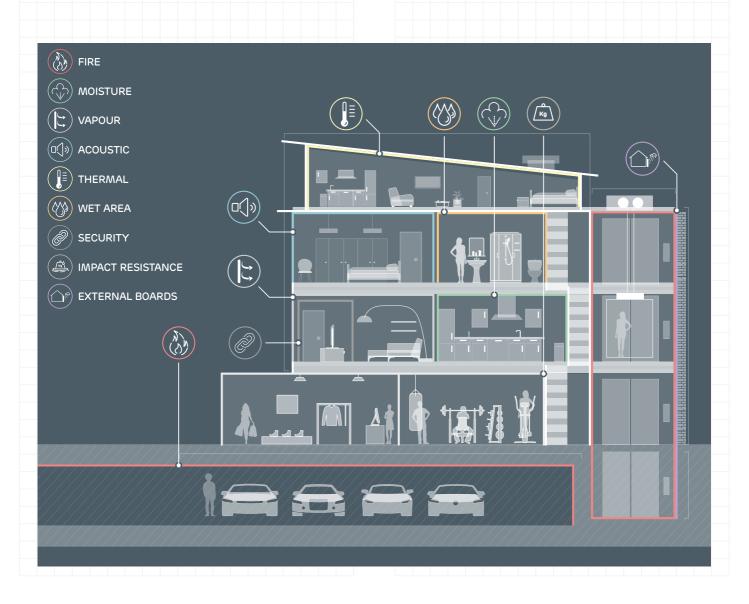

SINIAT BOARD SOLUTIONS

Siniat provides a wide range of performance and specialist plasterboards for all your drylining needs.

WHERE?	WHY?	SINIAT METAL FRAMING Vs. TIMBER
Domestic and commercial Metal or timber partitions Linings, floors and ceilings	To meet Part B, Part E, Part L and Part Q requirements Higher levels of protection against impact, sound, moisture and fire Guaranteed results when used with Siniat drylining solutions	Accurate dimensions No creeping, warp, bow or shrinkage Light and easy to use Strong and durable Faster to install

STANDARD BOARD SOLUTIONS

GTEC STANDARD BOARD

Used for internal walls, ceilings and partitions. Available with tapered or square edges in various sizes.



SIZES AVAILABLE

Tapered Edge 9.5 x 900 x 1800 9.5 x 1200 x 2400 9.5 x 1200 x 2700 12.5 x 900 x 1800 12.5 x 900 x 2400 12.5 x 1200 x 2350 12.5 x 1200 x 2400 12 5 x 1200 x 2500

12.5 x 1200 x 2700 12.5 x 1200 x 3000 15 x 900 x 1800

15 x 1200 x 3000

9.5 x 900 x 1800 9.5 x 1200 x 2400 12.5 x 900 x 1800 15 x 900 x 2400 12.5 x 900 x 2400 15 x 1200 x 2400 15 x 1200 x 2700

Square Edge

12.5 x 1200 x 2400 12.5 x 1200 x 2700 12.5 x 1200 x 3000 15 x 1200 x 2400

GTEC PLANK

A 19mm version of GTEC Standard Plasterboard for use in wall and flooring applications.




SIZES AVAILABLE

Tapered Edge 19 x 600 x 2400 Square Edge 19 x 600 x 2400

VAPOUR SOLUTIONS

GTEC VAPOUR BOARD

Incorporates a metallised vapour control layer to control condensation. Suitable for linings to roofs.



SIZES AVAILABLE

Tapered Edge


12.5 x 1200 x 2400 12.5 x 1200 x 3000 12.5 x 1200 x 2700 15 x 1200 x 2400

12.5 x 900 x 1800 12.5 x 1200 x 2400

MOISTURE SOLUTIONS

GTEC MOISTURE BOARD

For use where some moisture is present in the environment, such as bathrooms, kitchens and integral garages.



SIZES AVAILABLE

Tapered Edge

12.5 x 1200 x 2400 12.5 x 1200 x 3000 12.5 x 1200 x 2700 15 x 1200 x 2400

WET AREA SOLUTIONS

SINIAT AQUA BOARD

Siniat Aqua Board is a unique gypsum based board for use in high humidity and wet area applications. For areas with higher exposure to humidity such as bathrooms and wet rooms, Siniat Aqua Board is a tile-backing board that can also be easily decorated.



SIZES AVAILABLE

Tapered Edge

12.5 x 1200 x 850 15 x 1200 x 2400 12.5 x 1200 x 2400 15 x 1200 x 3000 12.5 x 1200 x 2700

FIRE SOLUTIONS

GTEC FIRE BOARD

Suitable for wall linings, partitions and ceilings that require superior fire performance to meet Part B Building Regulations.



Note: Fire moisture solutions available.

SIZES AVAILABLE

Tapered Edge 12.5 x 900 x 1800 15 x 900 x 1800 12.5 x 1200 x 2400 15 x 1200 x 2400

2.5 x 1200 x 2700 15 x 1200 x 2700 12.5 x 1200 x 3000 15 x 1200 x 3000 Square Edge 12.5 x 900 x 1800 12.5 x 1200 x 2400

TILEBACKER

TILEBACKER

A versatile water resistant fibre cement tile-backing board for domestic bath and shower room installations.



Sizes Available Square Edge 6 x 1200 x 800 12.5 x 1200 x 800

MULTIPURPOSE PANEL

MULTIPURPOSE PANEL

A versatile A1 fire rated calcium silicate building board suitable for use in a wide range of internal and semi-exposed applications. It is resistant to the effects of moisture and can withstand constant temperatures of up to 80 degrees - ideal for



soffit lining. SIZES AVAILABLE

Square Edge


6 x 800 x 1220 9 x 1220 x 2440 6 x 1220 x 2440 12 x 1220 x 2440

boiler backing, stove lining and

ACOUSTIC SOLUTIONS

GTEC E BOARD

A 10kg board to meet Part E Regulations. Suitable for installation with stud partitions, lining systems and ceilings especially designed for use within dwellings.




SIZES AVAILABLE

Tapered Edge

12.5 x 1200 x 2400

GTEC dB BOARD

Suitable for installation with stud partitions, lining systems and ceilings that require superior acoustic performance.



SIZES AVAILABLE

Tapered Edge

12.5 x 1200 x 2400 15 x 1200 x 2400 12.5 x 1200 x 2700 15 x 1200 x 2700 12.5 x 1200 x 3000 15 x 1200 x 3000



IMPACT AND SECURITY SOLUTIONS

GTEC UNIVERSAL BOARD

Suitable for wall linings, partitions and ceilings that require superior acoustic, fire and impact performance.



SIZES AVAILABLE

Tapered Edge

12.5 x 1200 x 2400 15 x 1200 x 2700 12.5 x 1200 x 3000 15 x 1200 x 3000 15 x 1200 x 2400

SINIAT MEGADECO

Pre-sealed performance board for rapid decoration, combining fire and impact resistance with acoustic insulation.



SIZES AVAILABLE

Tapered Edge

12.5 x 1200 x 2400 15 x 1200 x 2400 12.5 x 1200 x 2700 15 x 1200 x 2700 12.5 x 1200 x 3000 15 x 1200 x 3000

SINIAT SECURTEX BOARD

A reinforced plasterboard for secure partition systems meeting requirements of Secured By Design and Part Q for residential and commercial buildings.



SIZES AVAILABLE

Square Edge

15 x 1200 x 2400 15 x 1200 x 2700

15 x 1200 x 3000

SINIAT LADURA

Superior impact and pull out resistance for use in high traffic areas and extreme duty applications. Our strongest plasterboard that also offers



SIZES AVAILABLE

moisture resistance.

Tapered Edge

12.5 x 1200 x 2400 15 x 1200 x 2400 12.5 x 1200 x 3000 15 x 1200 x 3000

THERMAL SOLUTIONS

GTEC THERMAL EPS BOARD

GTEC Standard Board laminated to expanded polystyrene to create a product which offers up to 21x thermal resistance of standard plasterboard.**





SIZES AVAILABLE

Tapered Edge

22 x 1200 x 2400 40 x 1200 x 2400 30 x 1200 x 2400 50 x 1200 x 2400

GTEC THERMAL XP BOARD *

GTEC Standard Board laminated to extruded polystyrene to create a product which offers 29x thermal resistance of standard plasterboard.**





SIZES AVAILABLE

Tapered Edge

27 x 1200 x 2400 35 x 1200 x 2400

55 x 1200 x 2400

GTEC THERMAL PIR BOARD *

GTEC Standard Board laminated to polyisocyanurate foam insulation to create a product which offers 44x thermal resistance of standard plasterboard.** Prevents cold spots where surface condensation could form. A vapour barrier is provided as standard to control condensation within the wall.



SIZES AVAILABLE

Tapered Edge

72.5 x 1200 x 2400 37.5 x 1200 x 2400 52.5 x 1200 x 2400 82.5 x 1200 x 2400 62.5 x 1200 x 2400

* Not available in Northern Ireland and Republic Of Ireland.

** Percentage values quoted are a comparison of the thermal conductivity of the laminated insulation to standard plasterboard. Check building regulations for use of combustible insulation in external walls.

GTEC THERMAL K BOARD *

GTEC Standard Board laminated to phenolic foam insulation to create our top performing product which offers 59x thermal resistance of standard plasterboard.** Ideal when space is crucial. Superior performance from a thinner board.



SIZES AVAILABLE

Tapered Edge

30 x 1200 x 2400 40 x 1200 x 2400 50 x 1200 x 2400

60 x 1200 x 2400 70 x 1200 x 2400

WEATHER DEFENCE

SINIAT WEATHER DEFENCE

Siniat Weather Defence is a revolutionary gypsum-based sheathing board, faced with a water-resistant material. It is strong, easy to cut, lightweight and highly moisture and fire resistant. Weather Defence is a faster way to a weather-tight building compared to traditional sheathing boards.



SIZES AVAILABLE

Square Edge 12.5 x 1200 x 2400

- * Not available in Northern Ireland and Republic Of Ireland.
- ** Percentage values quoted are a comparison of the thermal conductivity of the laminated insulation to standard plasterboard.

Check building regulations for use of combustible insulation in external walls.


DRYLINING SOLUTIONS

Siniat provides a range of products and drylining solutions that are designed to meet building and refurbishment requirements.

WALL LININGS


SINIAT DIRECT **BOND SYSTEM**

For fixing Siniat plasterboards directly onto masonry backgrounds. A quick and effective system to install with no mechanical fixings required. When direct bonding thermal boards please use nailable plugs top left and right.




◆ SINIAT INDEPENDENT WALL LINING SYSTEM

A wall lining system designed for installation which is independent of existing walls. Suitable for uneven substrates or where the substrate cannot be boarded.



SINIAT DRYLINER SYSTEM

Suitable for drylining both new and existing uneven backgrounds, and for the concealment of services. A dry, quick and cost effective system using secure mechanical fixings.



SINIAT METAL STUD

PARTITION SYSTEM


An economical friction-fit system
to assemble frames for strong,
compact and light-weight
non-loadbearing partitions.




FLOORS AND CEILINGS

SINIAT ACOUSTIC FLOOR SYSTEM

A free-floating, sound insulating floor system for structural joist framing. Designed as a separating floor between and within dwellings. Exceptional airborne and impact resistance.






SINIAT SUSPENDED MF CEILING SYSTEM

Providing a high performance ceiling with sound insulation and fire protection. MF suspended ceilings can be used to upgrade and protect existing structures.

SINIAT DIRECT TO TIMBER CEILING SYSTEM

Using just boards and screws, direct to timber is the rapid installation method for attaching plasterboard to the underside of timber floor and roof trusses.



CHOOSING YOUR FINISHING AND JOINTING COMPOUNDS

		APPLICATION			PRODUCT DETAIL			APPLICATION METHOD	
		Bedding Coat	Finishing Coat	Patching and Repair	Bag / Bucket Size	Coverage (m²)	Shelf Life	Hand	Machine
SINIAT MULTIPURPOSE JOINT COMPOUND	a snot	~	~	~	10	37	9	~	×
SINIAT JOINT FILLER	a true	~	×	×	12.5	37	9	~	×
SINIAT JOINT CEMENT	C C	~	~	×	25	150	9	~	~
SINIAT SMARTMIX	THE SHARTHIN O	~	~	~	20	135	9	~	~
SINIAT DECO JOINT CEMENT	I'mx	~	~	~	20	135	9	~	~
SINIAT AQUAMIX	Aquamix Aquamix In second of the second of	~	~	~	20	135	6	~	~
	SINIAT JOINT FILLER SINIAT JOINT CEMENT SINIAT SMARTMIX SINIAT DECO JOINT CEMENT	SINIAT MULTIPURPOSE JOINT COMPOUND SINIAT JOINT FILLER SINIAT JOINT CEMENT SINIAT SMARTMIX SINIAT DECO JOINT CEMENT	SINIAT MULTIPURPOSE JOINT COMPOUND SINIAT JOINT FILLER SINIAT JOINT CEMENT SINIAT SMARTMIX SINIAT DECO JOINT CEMENT	SINIAT MULTIPURPOSE JOINT COMPOUND SINIAT JOINT FILLER SINIAT JOINT CEMENT SINIAT SMARTMIX SINIAT DECO JOINT CEMENT	SINIAT MULTIPURPOSE JOINT COMPOUND SINIAT JOINT FILLER SINIAT JOINT CEMENT SINIAT SMARTMIX SINIAT DECO JOINT CEMENT	Bedding Finishing Patching and Repair SINIAT MULTIPURPOSE JOINT COMPOUND IN X X 12.5 SINIAT JOINT FILLER X X 25 SINIAT SMARTMIX SINIAT SMARTMIX SINIAT DECO JOINT CEMENT SINIAT DECO JOINT CEMENT	Bedding Coat Coat Packing and Repair Bag / Bucket Coverage (m²) SINIAT MULTIPURPOSE JOINT COMPOUND SINIAT JOINT FILLER X X 12.5 37 SINIAT JOINT CEMENT X 25 150 SINIAT SMARTMIX SINIAT SMARTMIX SINIAT DECO JOINT CEMENT A COMPOUND DETAIL DOCUMENT Coverage (m²) A COMPOUND SINIAT SMARTMIX A COMPOUND DETAIL DOCUMENT Coat Coat Coat Coat A Coat Coat	Bedding Finishing Patching and Repair Bag / Bucket Coverage Shelf Life SINIAT MULTIPURPOSE JOINT COMPOUND INIAT JOINT FILLER X X 12.5 37 9 SINIAT JOINT CEMENT X X 25 150 9 SINIAT SMARTMIX SINIAT SMARTMIX JOINT CEMENT JOINT CEMENT	Bedding Finishing Coat Size Shelf Hand Coat (m²) Life Hand Size (m²) Life (m



SIMIAT LIFETIME SYSTEM WARRANTY
When systems are built entirely with Siniat components
and materials, by qualified professionals, in accordance
with our latest literature and relevant standards, we can
offer our invaluable Siniat Lifetime System Warranty.

SINIAT DRYLINING BOARD SELECTOR

A comprehensive GTEC GTEC GTEC Siniat Siniat Siniat GTEC GTEC GTEC GTEC Siniat Siniat Siniat GTEC Standard Board Vapour Board Moisture Board Agua Board TileBacker Multipurpose Panel Fire Board E Board dB Board Universal Board Megadeco LaDura Securtex Board Thermal Board range of Use in bathrooms, Siniat TileBacker is a fibre Bonded to different plasterboards Tapered or square edges 19mm board for walls, Vapour control lining Water and mould resistant. A1 calcium silicate When you need high levels Designed for use in Superior acoustic Multi-purpose, combining Fire, sound and impact Multi-purpose, A reinforced available in a wide range ceilings and partitions. for ceilings and kitchens and high Used in wet and high cement board for domestic board for internal and of fire protection. dwellings as defined by performance. fire, sound and impact resistance with precombining fire, sound plasterboard for secure types of insulation to meet all external walls. moisture areas. humidity areas. bath and shower room external use. Approved Document E resistance. sealed faces. Use with and impact resistance. to suit a variety of applications BS EN 14190 installations. Regulations. Deco Jointing System. thermal requirements. GTEC BS EN 13950 Fire MR For fire and moisture resistance. **MEASUREMENTS** Thickness (mm) 9.5, 12.5, 15.0 19.0 9.5, 12.5, 15.0 12.5, 15.0 12.5, 15.0 6, 12 6, 9, 12 12.5, 15.0 12.5 12.5, 15.0 12.5, 15.0 12.5, 15.0 12.5, 15.0 15 22-70 Width (mm) 900, 1200 600 900.1200 1200 1200 800 800.1200 900, 1200 1200 1200 1200 1200 1200 1200 1200 1800, 2400, 2700, 1800, 2400, Length (mm) 1800 - 3600 2400 2400, 2700, 3000 850,2400,2700 1200 1200, 2440 2400, 2700 2400, 2700, 3000 2400, 2700, 3000 2400, 2700, 3000 2400,3000 2400, 2700, 3000 2400 3000 2700,3000 GM-F. BS EN 520: 2004 H2 N/A D, F, I, R Α Α GM-H1, GM-I N/A D, F D D, I D, F, I, R D, E, F, H1, I, R D, F, I, R N/A Туре (TO BS EN 15283) **WALL LININGS** ~ ~ N/A Direct Bond X Dryliner N/A Independent N/A Wall Lining Linings N/A to Timber Frame **PARTITIONS** GTEC Metal **~** Stud Partitions GTEC Timber Stud Partitions FLOORS & CEILINGS Acoustic Floor X X **V** N/A Suspended N/A \checkmark MF Ceiling Direct to N/A **~** Timber Ceiling